


TRX Multi-Band Water Resistant Receiver

NEW & IMPROVED Multi-Band FEATURES:

- Water Resistant Case/Faceplate resists rain and water splashes. (not designed to protect against water immersion)
- Noise Blanker reduces unwanted sound, now with On/Off Switch. In strong signal areas where transmitters overload circuitry, turn Off to improve dynamic range.
- Digital Circuitry allows fast, accurate tuning of transmitters. Sharp, noise-reducing audio filters make background noise drop away.
- Improved Nickel Hydride battery has double the operational capacity, and almost no memory build-up problems.

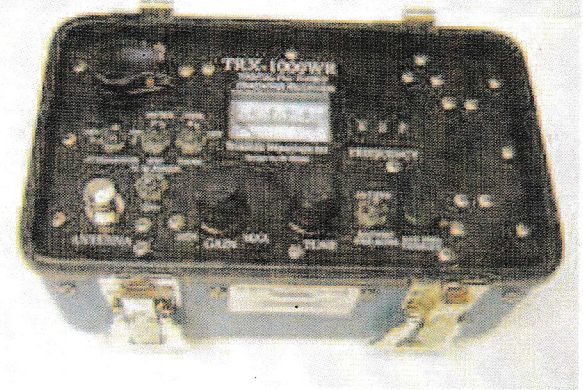

STANDARD FEATURES:

- Locates 200 animals per band
- 1000 KHz frequency range per band avoids interference with other signals
- Attenuator prevents swamping, insures accurate close-in tracking
- Signal meter needle deflects to show signal strength
- Signal meter is backlit to enhance night tracking
- New rechargeable Nickel Hydride batteries give 12 tracking hours on full
- DC cord allows for external operation from vehicle's 12 v cigarette lighter
- Recharge unit, DC power cord and padded nylon carrying case are included
- Optional lid-mounted throwaway batteries for use away from current
- Five year warranty on parts and labor

Available as
TRX-1000WR
TRX-2000WR
TRX-3000WR
TRX-4000WR
TRX-5000WR

Engineering Specifications:

Noise Figure:	1.5 dB or better
Input Impedance:	50 ohms +/- 10%
Frequency Range:	Standard bands are 150-151 MHz, 150.8-151.8 MHz, 151-152 MHz, 160-161 MHz, 164-165 MHz, 216-217 MHz, 217-218 MHz, 218-219 MHz, 220-221 MHz, Other bands available on request
Frequency Stability:	+/- 1 KHz maximum (-20 degrees to +70 degrees C)
Image and Spurious Rejection:	60 db or better
Minimum Discernible Signal:	-150 dBm (.007 microvolts) or better
Circuit Design:	Modern dual conversion superheterodyne circuit with 8 pole crystal filter plus manually controlled 40 dB Attenuator to prevent overload on strong signals
Manual Gain Range:	90 dB or better
Frequency Readout:	Digital, direct reading in 1 KHz steps; analog delta tune +/- 2 KHz from center frequency
Tuning:	Three-digit, push wheel switches control digital quartz-locked PLL synthesizer
Frequency Resetability:	To +/- 500 Hz
Signal Metering:	0-1 scale meter with high dynamic range circuit and backlight for night tracking
Noise Blanking Circuit:	Removes impulse and ignition noise to enhance tracking in difficult conditions
Operating Voltage:	12-15 VDC through external DC jack (fused cigarette lighter cord included) or internal Nickel Hydride battery pack



Wildlife Materials, Inc.

1202 Walnut Street Murphysboro, Illinois 62966 USA
USA 1-800-842-4537 FAX 1-618-687-3539 CANADA 1-800-626-2704
www.wildlifematerials.com